

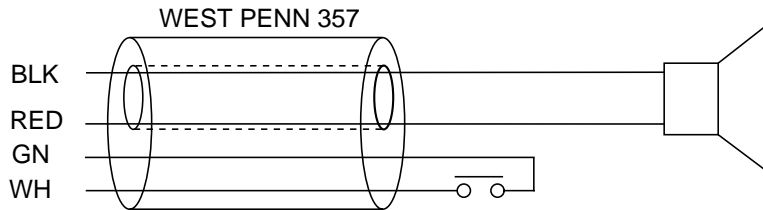


TYPICAL  
IC-29  
HOOK-UP  
↓


SPKR -  
SPKR +  
COM  
CALL  
OR TALK,  
SHUTOFF

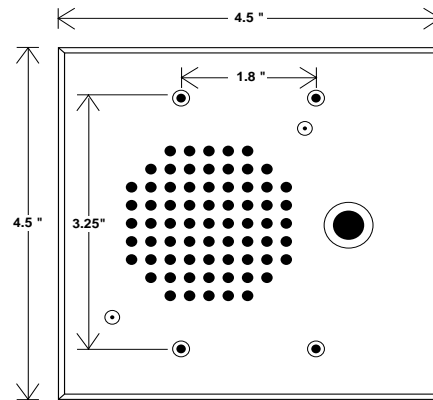


45 ohm  
SPEAKER

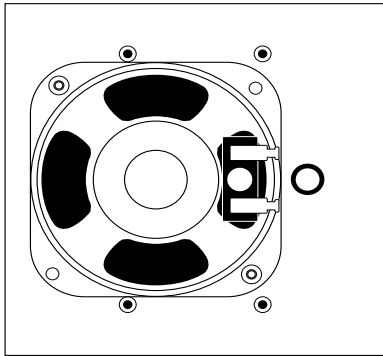

Frequency Response ~ 400 - 12K +/- 6dB  
Sensitivity ~ 89 db (1w/1m) @ 2k  
Max SPL Output ~ 90dB +/- 3dB  
Power Handling ~ 1/2 watt  
Nominal Impedence ~ 45 ohms  
Call Button ~ Momentary Push button  
250ma rated Gold Contact  
Plate ~ .125" clear anodize brush aluminium  
Weight ~ 6.50 oz

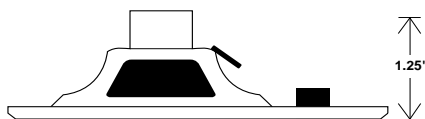

IS-3002B SPEAKER & CALL BUTTON STATION			
 <b>COMMUNICATIONS COMPANY inc.</b> 9181 CHESAPEAKE DR SAN DIEGO, CA 92123 Ph (858)560-4162 Fax (858)560-1923	Drawn	MSJ	Date
	Checked	MSJ	Eng.
		NO: 669-SD-1071	