



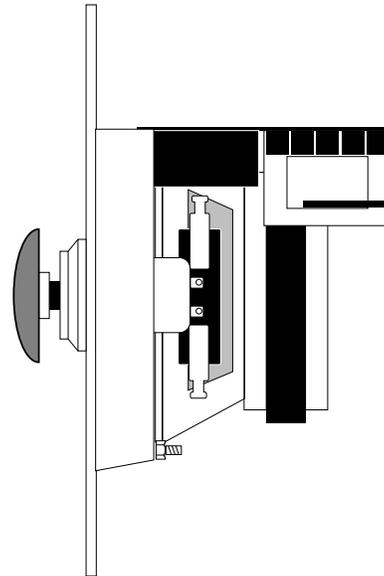

The IS-T100WP intercom security speaker station is a water-proof security station designed to operate with the TOA IC-100 intercom systems. The two gang intercom station survives damage from mistreatment, shock and atmospheric extremes. It includes a 25 Volt, jumper-selectable wattage tap (1/2 or 1 Watt), and call circuitry on a 12 gauge brushed stainless steel faceplate with an attached weather proof mylar cone speaker. The large red call switch is a momentary action mushroom push-button designed for ADA support. The 8 Ohm speaker is water and fungus resistant and also functions as a microphone to provide remote station talkback when included in a centrally located master control system.

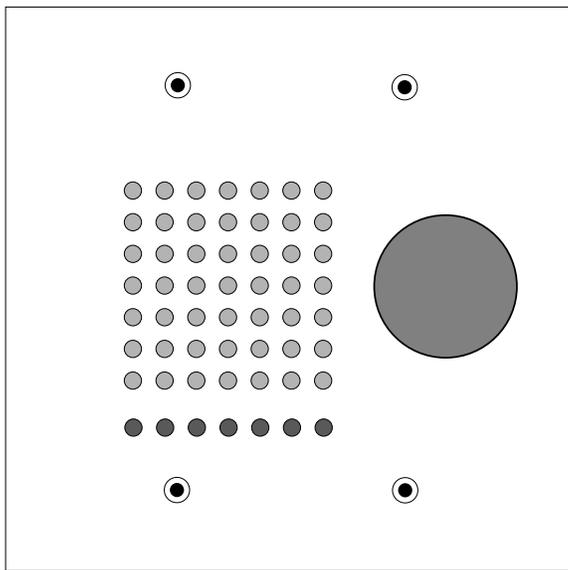

### SPECIFICATIONS

**MODEL:** IS-T100WP  
**TYPE:** Water-proof security intercom speaker station.  
**FREQUENCY RESPONSE:** 400-4k Hz.  
**POWER TAPS:** 1, 1/2 Watts, 25 Volts  
(Slide-on jumper selectable).  
**SOUND PRESSURE LEVEL:** 93dB, 1 Watt @ 10 feet.  
**SENSITIVITY AS MICROPHONE:** -26dBm.  
**SPEAKER:** 2.5 inch Mylar Cone, 8 Ohm,  
water and fungus resistant.  
**SWITCH:** Momentary push-button with 1.187" dia.  
red, nylon mushroom cap button.  
**MECHANICAL LIFE:** 1,000,000 Cycles  
**RATING:** 10 Amperes, Resistive  
**CIRCUIT:** SPDT  
**SEAL:** Moisture proof and dust tight.  
**FACE PLATE:** 12 Gauge, brushed stainless steel  
**MOUNTING:** Flush, RACO #696 concrete box  
or equivalent. CARLON 6x6x6 plastic  
weather-proof box or equivalent.  
**DIMENSIONS:** 4.5"w X 4.5"h X 2.2"d  
**WEIGHT:** 1.3 lbs

### APPLICATIONS

PARKING STRUCTURES  
CORRECTIONAL INSTITUTIONS  
BUILDING STAIRWAYS AND HALLWAYS  
SCHOOLS AND UNIVERSITIES

### ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The outdoor security intercom sub-station shall be a Communications Co. Inc. model IS-T100WP, or approved equal. The station shall be comprised of an 8 Ohm water and fungus resistant cone speaker, mounted on a 12 GA. stainless steel plate devised to drain all water out holes below speaker hole pattern. The speaker driver shall function as a microphone with a minimum sensitivity of -26 dBm. The sub-station is equipped with a large mushroom momentary push-button call switch with a contact rating of 10 Amps. The station shall have a power rating of 1 Watt with a frequency response of 400-4k Hz. The station shall include a 25 Volt transformer with 1/2 & 1 Watt taps and call circuitry which allows operation with the TOA IC-100 intercom system is conformal coated for water resistance. The sub-station shall mount with #6-32 flathead, tamper-resistant screws (not included).

